



# BAL COMPLIANT DOORS

We have a large range of beautiful door panels that are deemed to satisfy the requirements of AS 3959:2018 BAL12.5, with some options up to BAL40!


When ordering or requesting a quote for a Parkwood BAL Rated door, please tell us what BAL Rating is required so we can ensure that the door complies.

## BAL40 Aluminium front doors

Our range of architecturally designed front doors are powder-coated to the colour of your choice for low maintenance and are capable of enduring all weather. The aluminium structure provides stability and strength, offering the best security to keep your family safe, while the sleek, classic design is sure to wow your visitors.



# BAL 29 Aluminium front doors

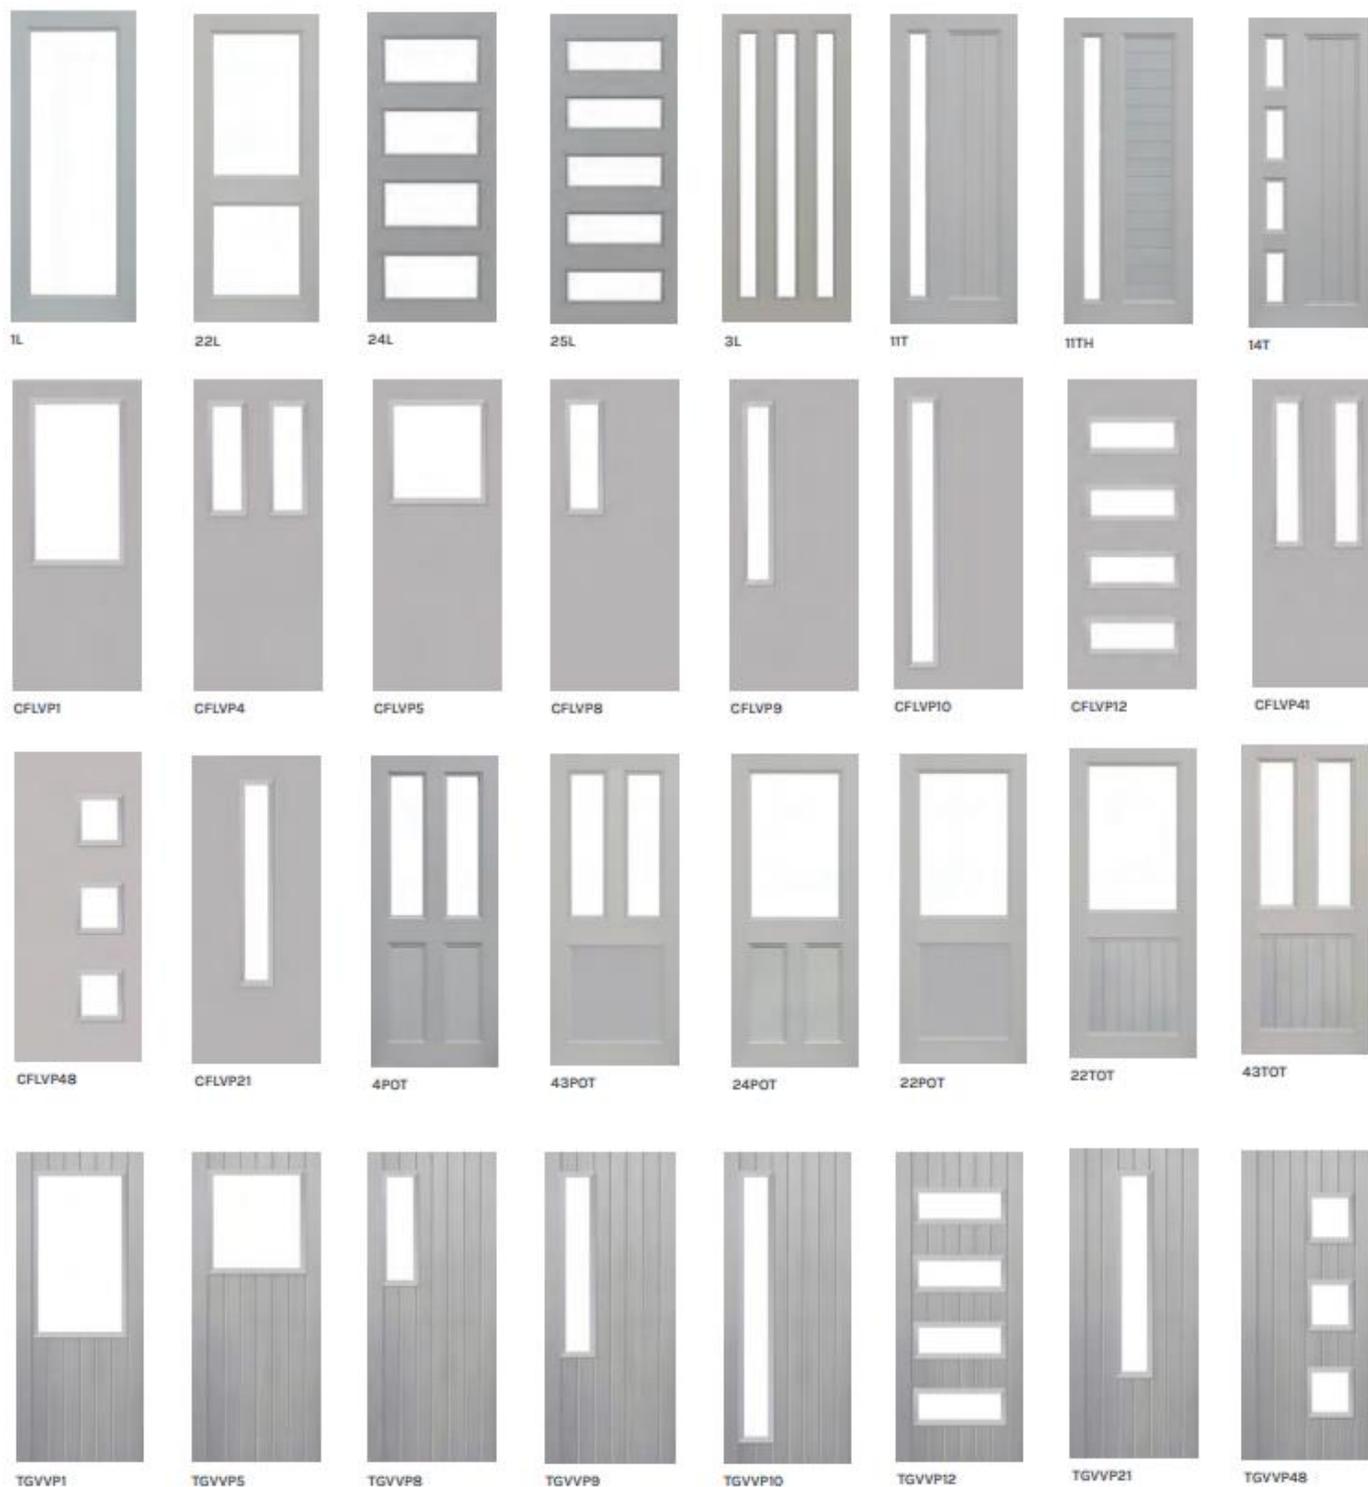

## Glazing minimum requirements:

- BAL 12.5 - Toughened glass, minimum 5mm thick (6.38mm laminate is OK)
- BAL 19 - Toughened glass, minimum 5mm thick
- BAL 29 - Toughened glass, minimum 6mm thick
- BAL 40 - No glazed timber doors

In the case of double-glazed glass, only the outer pane is required to meet these requirements.

# BAL 29 Timber front doors

Parkwood premium solid timber doors are hand-crafted by our team of skilled tradespeople and designed to suit your unique home and style. For BAL29 we can use any of our available timbers unless it is a glazed door then only Kwila (Merbau) can be used.



# BAL12.5 Aluminium front doors



# BAL12.5 Timber front doors

For BAL12.5 we can use any of our available timbers, unless it is a glazed door then only Rosewood and American White Ash can be used.



# BAL12.5 Duramax

These doors have been tested and approved for BAL 12.5 certification



There may be some limitations in door sizes due to the minimum size glass can be toughened, please check the size with us first. Please remember When ordering or requesting a quote for a Parkwood BAL Rated door, please tell us what BAL Rating is required so we can ensure that the door leaf complies.

The document shows you what Parkwood door style will cover each rating and is deemed to comply to AS 3959:2018 standard.

Please take note that this is only for the door LEAF. Doors must be hung in a suitable frame with seals and hardware that will comply with the required BAL. No responsibility will be held by Parkwood if the door frame, hardware, or fitting is not compliant to the standard.



**NEW ZEALAND** | 0800 10 10 28  
sales@parkwooddoors.co.nz  
parkwooddoors.co.nz

**AUSTRALIA** | 1800 681 586  
sales@parkwooddoors.com.au  
parkwooddoors.com.au